



BCS-P-DIP25FSR3-Ai1(-G)

Network dome camera 5Mpx with lens 2.8mm

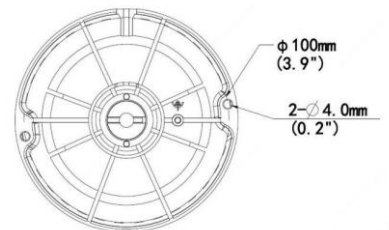

- Sensor 1/2.7" 5Mpx PS CMOS
- Straight technology
- Compression H.265+/H.264+/MJPEG
- Triple stream coding
- IR cut filter with auto-switch
- Digital Noise Reduction 2D/3D
- Built-in web-service, support BCS-NVR, CMS(BCS Manager), mobile app BCS(android, iOS), P2P, Onvif
- Functions AWB, AGC, AES, BLC, HLC, ROI, Defog, WDR(120dB), 2D/3D DNR
- Motion detect, privacy masking
- Intelligent functions: perimeter protection, intrusion, crossline
- IR range up to 30m
- Fixed lens 2.8mm F1.6
- 1 alarm in / 1 alarm out
- 1 audio in / 1 audio out
- Outside metal casing IP67, IK10
- Working environment -30°C ~ +60°C
- Edge storage microSD do 256GB
- Power supply DC 12V / PoE(802.3af)

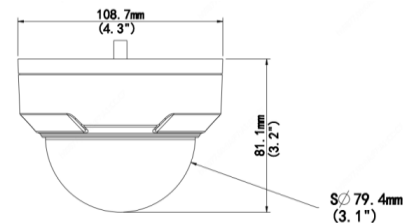

BCS-P-DIP25FSR3-Ai1(-G)

Network dome camera 5Mpx with lens 2.8mm

Video system	IP
Scanning system	Progressive Scan
Sensor	1/2.7" 5Mpx CMOS
Pixels	2880(H) × 1620(V)
Min. illumination	0.003Lux/F1.6 (Color, AGC On); 0Lux(B/W, IR On)
S/N ratio	> 56dB
Lens	Fixed 2.8mm F1.6
Angle of view	H: 96.1°, V: 55.3°
DORI	Detect 63m /Observe 25m /Recognize 13m / Identify 6m
White balance	(AWB) Auto/manual
Backlight compensation	BLC / HLC / WDR(120dB)
Shutter	Auto/manual (1~1/100000s)
Gain control	(AGC) Auto/manual
Noise reduction	2D/3D DNR
Motion detect	4 areas
Privacy masking	4 areas
Image rotate	Mirror, flip
Day/night	IR cut filter witch auto-switch ICR
IR range	30m
Video compression	H.265 / H.265+ / H.264 / H.264+ / MJPEG
Resolution	5M(2880×1620) / 4M(2560×1440) / 3M(2304×1296) / 1080P(1920×1080) / 720P(1280×720) /
Main stream	5M/4M/3M/1080P/720P@30fps
Second stream	720P/D1/(640×360)/2CIF/CIF@30fps
Third stream	D1/(640×360)/2CIF/CIF@30fps
Network	RJ-45 (10/100Mbps)
Audio	1 in / 1 out
Audio compression	G.711
Alarm	1 in / 1 out
Protocols	IPv4, IGMP, ICMP, ARP, TCP, UDP, DHCP, PPPoE, RTP, RTSP, RTCP, DNS, DDNS, NTP, FTP, UPnP, HTTP, HTTPS, SMTP, 802.1x, SNMP, P2P
Compatibility	ONVIF(S/G/T)
Users	Max 10 logged in
Mobile	iOS, android
Edge storage	microSD 256GB
Power supply	DC 12V (±25%) / PoE(IEEE802.3af)
Power consumption	5W
Working environment	-30°C ~ +60°C, 10%~95% RH
Casing	IP67, IK10
Weight	0.42kg
Dimensions	Φ109 × 81mm



BCS-P-DIP25FSR3-Ai1(-G)

Network dome camera 5Mpx with lens 2.8mm

Junction box
BCS-P-A173(-G)



Wall mount
BCS-P-U112(-G)



Wall mount
BCS-P-U113(-G)

